


Datasheet


Autosmart MSV

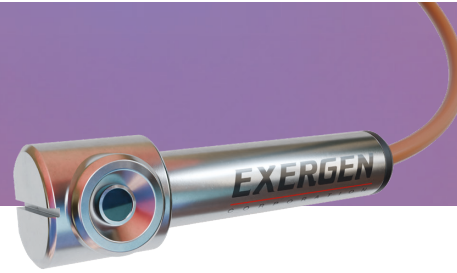

Product Overview

The AutoSmart MSV features:

- Output 0-5V, 0-10V, 4-20mA (scalable)
- Non-contact
- Repeatability error 0,1% full scale
- Interchangeability $\pm 1,5\%$ full scale
- Resolution approx. 0,1°C (0.2°F)
- Small size sensor

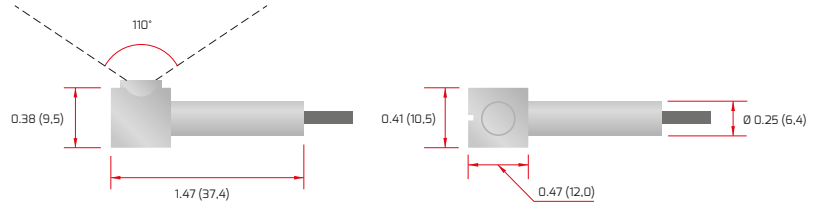

Technical Data

Sensor Range	-18 to 524°C (0 to 975°F)
Sensor Ambient Temperature Range	-20 to 85°C (-29 to 185°F) permanent -20 to 100°C (-29 to 212°F) non permanent
Transmitter Ambient Temperature Range	0 to 70°C (32 to 158°F)
Storage Temperature Range	-10 to 70°C (14 to 158°F)
Field of View	110° (1:2) approximately
Minimum Spot Size	3 mm (0.1")
Spectral Response	5,5 to 20µm
Update Time	Approximately 250 msec.
First Reading Upon Power Up	Approximately 2 seconds

Connector cable	3 m (9.8 ft) 22AWG*4C + F + Jacket black PUR cable OD=5,0 mm -40°C~+105°C
Sensor cable	0,9 m (3ft) Unshielded, duplex insulated, type K, 24AWG, PFA jacket rated to 260°C (500°F)
Sensor Dimensions	See diagram above
Weight	Sensor: Approximately 30g (1oz.) with cable Transmitter: Approximately 50g (1.702oz.)
Housing	Sensor: Stainless steel, hermetically sealed, exceeds NEMA 4X, IP67. Transmitter: Heavy Duty SS, NEMA, IP54. Air Purge: Makrolon-9415
Emissivity Setting	0,90
Power	12 or 24VDC ($\pm 10\%$). Shuts off when voltage is functionally low
Power Consumption	$\pm 10\text{mA}$ (without output signal device)
Loop Impedance	(4-20mA models) >500Ω

Ordering Information

AutoSmart MSV - ☐ - ☐ - ☐

Power:

12 = 12VDC

24 = 24VDC

Output:

005 = 0-5V

010 = 0-10V


420 = 4-20mA

Temperature range:

100 = 0 to 100°C (32 to 212°F)

250 = 0 to 250°C (32 to 482°F)

Dimensions



USA

400 Pleasant Street
Watertown
02472 MA
cleverIR-USA@cleverir.com
+1 617 649 7597

www.cleverir.com

Europe

Pastoor Clercxstraat 26
5465 RH Veghel
The Netherlands
office@cleverir.com
+31 413 376 599